


**BORA** 

8W/m · IP67 · 24V · CRI>90


Power 8 W/m  
Life Time 75.000 h  
PCB Thickness 3 oz  
Voltage 24V  
CRI >90  
SDMC ≤3





Code	CCT (K)	Lumen output
84270	● 2700K	230 Lm/M
84271	● 3000K	240 Lm/M
84272	○ 4000K	250 Lm/M
84273	● 6000K	260 Lm/M

LED SMD 2835  
30 m  
140 LED/m  
Test LM 80  
50 mm  
120°

**IP 67**  
Non Flicker

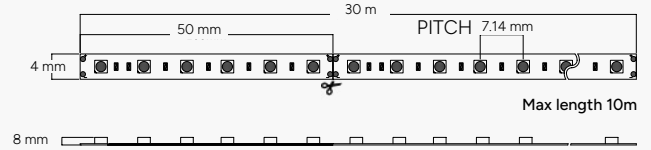

Importante instalar disipador de calor / Important to install heat sink / Important d'installer le dissipateur de chaleur / Importante installare il dissipatore di calore




**ACCESORIES**


Code	Description
84284	Perfil recto 1 m / Straight profile 1 m / Profilé droit 1 m
84282	Clip de montaje / Mounting clip / Clip de montage / Clip di montaggio
84280	Tapa inicial / Initial cover / Embout de fermeture initiale
84281	Tapa final / End cap / Embout de fermeture finale




BORA




84284



84282



84281



84280