






# AURA


8W/m · IP67 · 24V · CRI>90

Power 8 W/m	Life Time 75.000 h	PCB Thickness 3 oz
Voltage 24V	CRI >90	SDMC ≤3





Code	CCT (K)	Lumen output
84390	● 2700K	520 Lm/M
84391	● 3000K	560 Lm/M
84392	○ 4000K	580 Lm/M
84393	● 6000K	600 Lm/M

LED SMD 2219	 30 m	 240 LED/m	<b>IP 67</b>
Test LM 80	 25 mm	 120°	Non Flicker

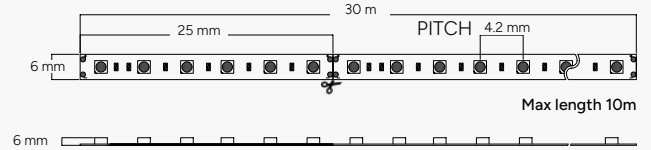

Importante instalar disipador de calor / Important to install heat sink / Important d'installer le dissipateur de chaleur / Importante installare il dissipatore di calore




## ACCESORIES


Code	Description
84404	Perfil recto 2 m / Straight profile 2 m / Profilé droit 2 m
84402	Clip de montaje / Mounting clip / Clip de montage / Clip di montaggio
84400	Tapa inicial / Initial cover / Embout de fermeture initiale
84401	Tapa final / End cap / Embout de fermeture finale




AURA




84404



84402



84401



84400