

MISURI


14.4W/m · IP65 · 24V · CRI>80

Power 14.4 W/m
Life Time 75.000 h
PCB Thickness 3 oz


Voltage 24V
CRI >80
SDMC ≤3

Code	CCT (K)	Lumen output	Lm/W	M
84951	● 2700K	1325 Lm/M	92 Lm/W	1 m/L
84952	● 3000K	1354 Lm/M	94 Lm/W	
84953	○ 4000K	1397 Lm/M	97 Lm/W	
84954	● 6000K	1440 Lm/M	100 Lm/W	
84956	● 2700K	1325 Lm/M	92 Lm/W	5 m Roll
84957	● 3000K	1354 Lm/M	94 Lm/W	
84958	○ 4000K	1397 Lm/M	97 Lm/W	
84959	● 6000K	1440 Lm/M	100 Lm/W	

LED SMD 2835
5-20 m
120 LED/m
IP 65
Silicone
100 mm
120°
Non Flicker

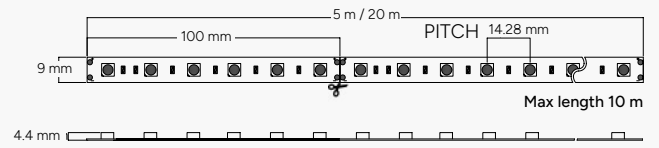

Importante instalar disipador de calor / Important to install heat sink / Important d'installer le dissipateur de chaleur / Importante installare il dissipatore di calore

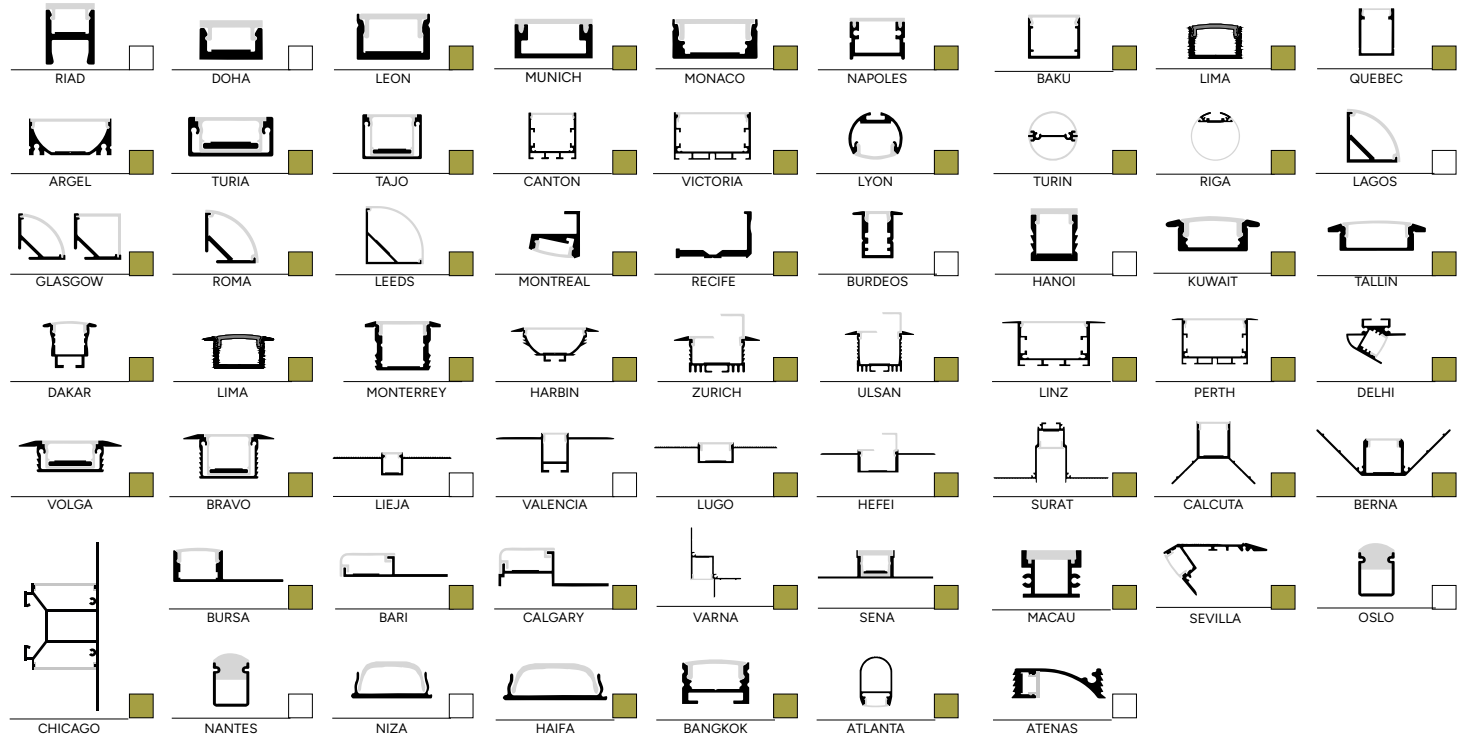

*m/L: Lineal meter

 Compatible / *Compatibile*  No compatible / *Not compatible / Non compatibile / Non compatibile*